













# Low Pressure Treated Timber Specification Guide

## TREATMENTS

Important information for users of Osmose Protim Clearchoice Low-Pressure treated timber


Treatment Code	Use Class	Examples of end use	Treatment Centre
PV1	1/2	Internal construction, timber frame, roofing and tiling timbers	   
PV2	1/2/3	Plywood	   
PV3	3	Joinery or timber used externally above ground and protected by a suitable and maintained surface coating	   

### Desired service lives

For timbers used in Use Class 1 and 2: up to 60 years

For timbers used in Use Class 3: 15 to 30 years

### Preservation Process

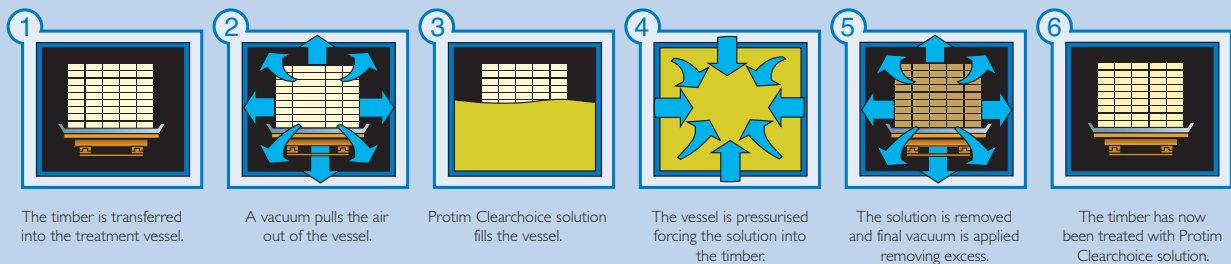

**Please note:**

Preservative penetration depends upon species, end use classification and in some cases heartwood / sapwood ratios.  
Unseasoned timber – Whilst every effort is made to service treat any unseasoned timber (above 28% moisture content) to the correct specification. PTGTreatments cannot be held responsible for the actual net retention of preservative achieved through the treatment due to the high moisture content of the wood.



**T:** 01757 249908 **E:** neil.ryan@ptgtreatments.co.uk - Head Office

**T:** 01777 709855 **E:** steve.adams@ptgtreatments.co.uk - Sales & Operations

**T:** 01205 355669 **E:** Boston@ptgtreatments.co.uk - Boston, Lincolnshire

**T:** 01482 329114 **E:** Hull@ptgtreatments.co.uk - Hull, East Yorkshire

**T:** 01375 858700 **E:** Tilbury@ptgtreatments.co.uk - Tilbury, Essex

**T:** 01383 418533 **E:** Rosyth@ptgtreatments.co.uk - Rosyth, Fife

**T:** 01738 635521 **E:** Perth@ptgtreatments.co.uk - Perth, Tayside